

**NON-HALOGEN FLAME RETARDANT**

# AUTOMOTIVE OEM

## BUSBAR CARRIER FOR EV BATTERY


### AVIENT SOLUTION

Maxxam™ NHFR Non-Halogen Flame Retardant Polyolefin Formulation - H6 GF/30 XF V0 Black T 70

### WHY AVIENT?

- Provide a non-halogenated solution with increased performance
- Supported our customer throughout the project with design, regulatory and technical expertise
- Helped to achieve the rigid requirements of EV battery applications

### LEARN MORE

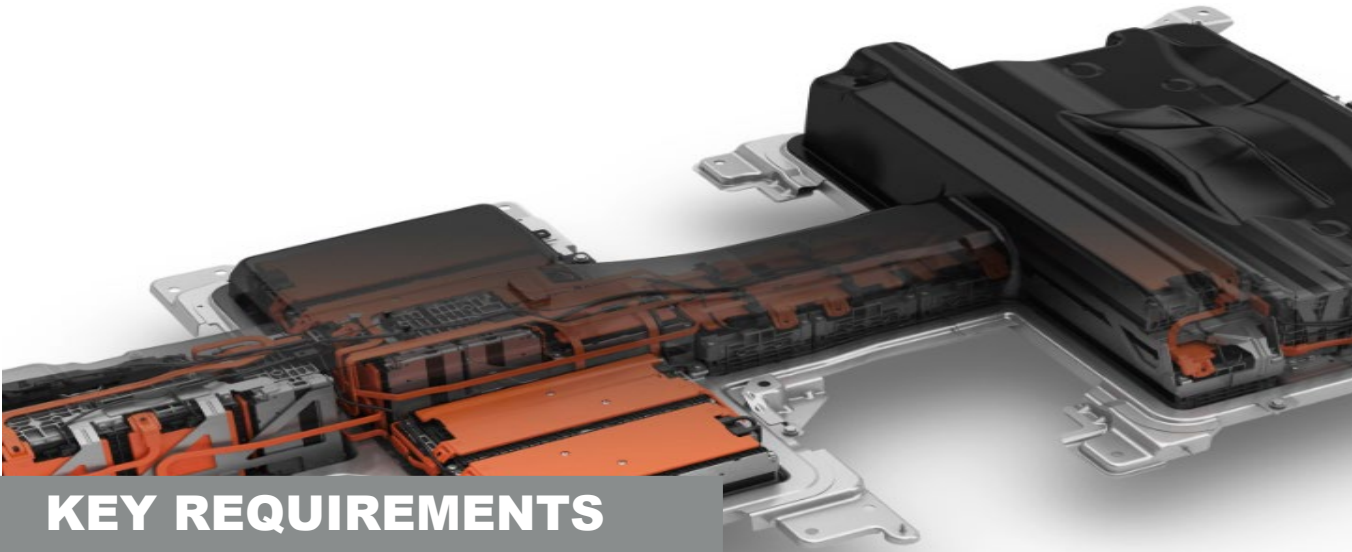

### KEY REQUIREMENTS

- Non-halogen solution
- Flame performance to UL 94 V-0 @ 1.6 mm, GWFI 960°C @ 2mm
- Excellent mechanical properties
- Easy to process
- Heat stabilized and high flow properties